


## Vibration Absorbers



- Sixteen models available to fit copper tubing from 1/4 through 4-1/8 inches O.D.
- Each unit pressure and vacuum tested, cleaned, dehydrated and sealed in plastic film
  - U.L. and C.S.A. approved

### Notes:

1. All dimensions are in inches.
2. Due to a continuous program of product improvement, specification and dimensions are subject to change without notice.
3. For unusual installations, Packless vibration absorbers can be provided in special lengths or with PVC coating to protect them from condensation and freezing. Please consult factory with requirements.

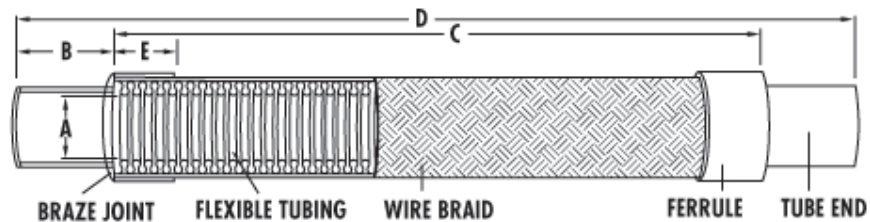

<u>Model Number</u>	<u>Tubing Actual</u> <u>O.D.</u>	<u>Tubing</u> <u>Nominal I.D.</u>	<u>A</u>	<u>D</u>	<u>Maximum</u> <u>Working</u> <u>Pressure</u> <u>(psig)</u>	<u>Burst</u> <u>Pressure</u> <u>(psig)</u>
<a href="#">VAF-1</a>	1/4	1/8	1/4	7	660	3300
<a href="#">VAF-10</a>	1-3/8	1-1/4	1-1/4	14-3/4	540	2700
<a href="#">VAF-11</a>	1-5/8	1-1/2	1-1/2	17	500	2500
<a href="#">VAF-2</a>	1/4	1/8	1/4	7-1/2	660	3300

<a href="#">VAF-3</a>	3/8	1/4	3/8	8-1/4	620	3100
<a href="#">VAF-4</a>	1/2	3/8	3/8	9	620	3100
<a href="#">VAF-5</a>	5/8	1/2	1/2	9-3/4	620	3100
<a href="#">VAF-6</a>	3/4	5/8	1/2	10	620	3100
<a href="#">VAF-7</a>	3/4	5/8	3/4	11-1/4	620	3100
<a href="#">VAF-8</a>	7/8	3/4	3/4	11-1/2	620	3100
<a href="#">VAF-82</a>	2-1/8	2	2	20	390	1950
<a href="#">VAF-83</a>	2-5/8	2-1/2	2-1/2	24	340	1700
<a href="#">VAF-84</a>	3-1/8	3	3	27	300	1500
<a href="#">VAF-86</a>	4-1/8	4	4	33-3/8	175	525
<a href="#">VAF-87</a>	3-5/8	3-1/2	3-1/2	32-5/8	175	525
<a href="#">VAF-9</a>	1-1/8	1	1	13	540	2700